

# PERFO-AK

## Anchor Tile


### Technical Specifications

Material:	PE
Colour:	Black
Closed surface area (load bearing):	50% + 50%, in two tiers
Surface structure:	raised profile for grip / drainage channels
Load bearing capability:	up to 100 tonnes/m <sup>2</sup> * * depending on ground conditions and preparation
Dimensions (individual tile)** **not including connecting lugs	300 x 300 x 75 mm
Weight per tile:	approx. 515 g
Dimensions as supplied (made-up section):	121 x 91 cm 3 x 4 Perfo tiles
Area per made-up section:	approx. 1.10 m <sup>2</sup>
Weight per made-up section:	approx. 6.2 kg
No. of sections per pallet:	50
Total surface area per pallet:	approx. 55 m <sup>2</sup>
Weight per pallet:	approx. 320 kg
Height per pallet:	approx. 218 cm

Resistant to oil, solvents, salt water,  
most acids.

UV and frost resistant

Does not rot

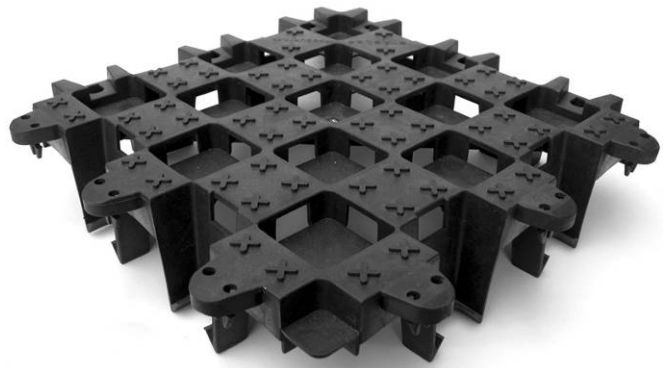

Non-perforated white tiles for marking purposes,  
eg. to demarcate parking bays or for centre-lines  
are also available on request.