

PERFO

Interlocking Ground Reinforcement Tiles

Technical Specifications

Material:	PE / PP	
Colour:	Black	
Closed surface area (load bearing):	75%	
Surface texture:	raised points for grip	
Load bearing capability:	up to 40 tonnes/m ² * * depending on ground conditions and preparation	
Dimensions (individual tile)**	200 x 200 x 37 mm (single element tile)	405 x 405 x 37 mm (4 element combi-tile)
**not including connecting lugs		
Weight per tile:	approx. 225 g	approx. 900 g
Dimensions as supplied (made-up section):	a) 121 x 81 cm 6 x 4 Perfo tiles	b) 121 x 121 cm 6 x 6 Perfo tiles
Weight per made-up section:	5.5 kg	8.1 kg
No. of sections per pallet:	55	55
Total surface area per pallet:	Approx. 54 m ²	Approx. 81 m ²
Weight per pallet:	approx. 320 kg	approx. 460 kg
Height per pallet:	approx. 220 cm	approx. 220 cm


Resistant to oil, solvents, salt water,
most acids.

UV and frost resistant

Does not rot

Deliveries may consist of both single element and 4 element combi-tiles, which are completely compatible with each other. If single element tiles are specifically required, this should be stated at the time of ordering.

Non-perforated white tiles for marking purposes, eg. to demarkate parking bays or for centre-lines are also available on request.

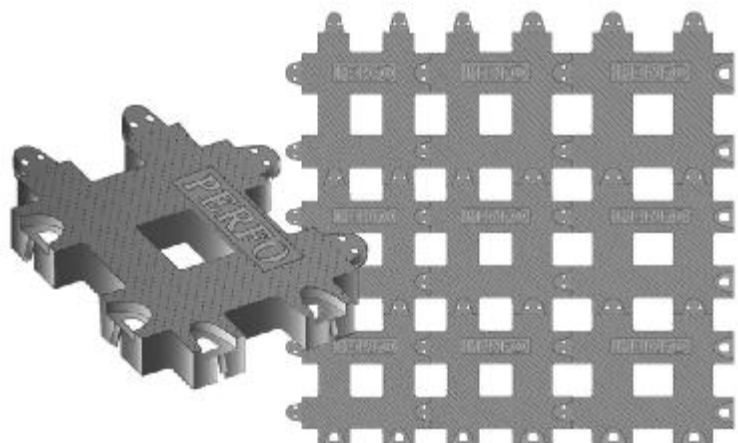

PERFO - S2T Grass Reinforcement

A division of Source2Trade Ltd.
Jan 2008